


BOLTARON® 9815D

FAR-Rated High Impact Resistant Decorative Design Sheet

Industry's widest range of decorative patterns expands design options.

66% higher impact resistance extends service life of interior components.

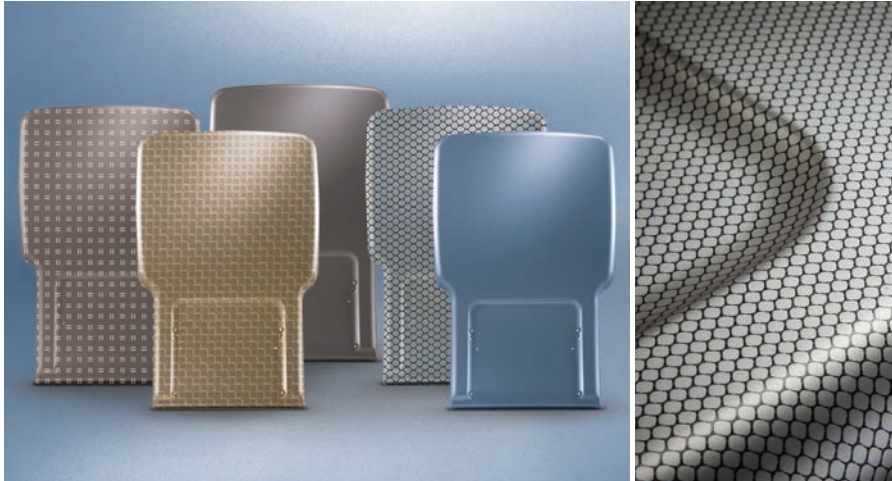

Boltaron® 9815D expands design freedom for aircraft interiors with the broadest range of custom decorative patterns and textures available in FAR 25.853(d) rated thermoplastic alloy sheet.

This proprietary extruded thermoplastic alloy sheet meets FAR 25.853(a) and FAR 25.853(d) for smoke density and heat release. It also features notched Izod impact resistance of 5.0 ft-lb/in. (265 J/m) vs. competitive 65/65 rated products that measure 3.0 ft-lb/in. (159 J/m), to improve service life of interior components.

Boltaron's unique manufacturing capabilities in custom decorating—in addition to custom colors and surface textures—allow cost-effective low minimums with fast turnaround, enabling small runs for prototyping and design evaluation prior to full-scale production.

In thermoforming, Boltaron® 9815D maintains wall thickness integrity in deep draws and sharp corners. Its consistent quality also ensures uniform appearance in formed parts.

The Boltaron impact resistant FAR 25.853(d) rated product family includes 9815E extruded sheet, 9815M in metallic finishes, 9815D with unlimited decorative patterns, 9815P in the widest range of textures, and 9815F film and thin-gauge sheet for two- and three-dimensional laminating, and Boltaron® 9850 with a 50/50 rate of heat release.

Advantages



- Wide range of decorative patterns includes carbon fiber, simulated fabrics, woodgrains, abstracts
- 66% Greater impact resistance than other 65/65 thermoplastic alloy sheet
- Uniform high quality appearance
- Wall thickness integrity in deep draw forming
- Custom textures and colors at low minimums
- Lot-to-lot color consistency

Proven Applications

- Instrument panel housings
- Class dividers
- Bulkhead laminates
- Galley and lavatory components
- Bull noses, gap covers, moldings
- Sidewall and kick panels
- Window reveals
- Seat parts, backs, arm rests
- Tray tables
- Passenger Service Units (PSUs)
- Light housings
- Video monitor shrouds
- Life vest shrouds
- Air ducts

Configurations

- Sheet sizes
 - Lengths: Variable per design
 - Widths: Variable per design
 - Gauges from 0.040 to 0.250 in. (1.02 to 6.35 mm)
- Colors, textures
 - Industry's widest range of textures
 - 500 lb minimum

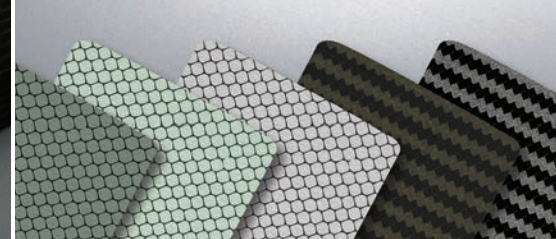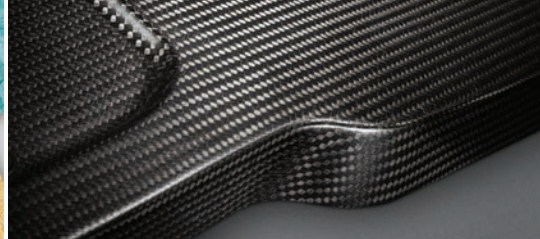

PROPERTIES, FAR RATINGS

PROPERTY	TEST METHOD*	TYPICAL VALUES	
Specific Gravity	ASTM D792	1.490	
Tensile Strength	ASTM D638	5,500 psi	38 MPa
Flexural Strength	ASTM D790	8,700 psi	60 MPa
Flexural Modulus	ASTM D790	410,000 psi	2,827 MPa
Izod Impact (notched) @ 73 °F (23 °C)	ASTM D256	5.0 ft-lb/in.	265 J/m
Hardness Rockwell	ASTM D785	107	
Heat Deflection (annealed)	ASTM D648	170 °F @ 264 psi	77 °C @ 1.8 MPa
Thermal Expansion	ASTM D696	1.67 x 10 ⁻⁵ /°F	3 x 10 ⁻⁵ /°C

FAR RATINGS

Flammability		
Vertical burn, 60 sec	FAR 25.853(a)(i)	PASS
Vertical burn, 12 sec	FAR 25.853(a)(ii)	PASS
OSU Heat Release		
Peak - HRR, kW/m ²	FAR 25.853(d)(Part IV)	<65
2 Min - HRR, KW-min/m ²		<65
NBS Smoke		
Ds @ 1.5 min	FAR 25.853(a)(Part V)	<100
Ds @ 4 min		<200

*Independent lab tests. All tests at 73 °F (22.8 °C) in dry conditions unless otherwise noted.

MEMBRANE PRESSING TYPICAL PARAMETERS

Mold Shrinkage	0.5 - 0.7%	
Forming Temperature	335 - 370 °F	168 - 188 °C
Typical Heater Settings	30 - 50% Top	50 - 70% Bottom
Drying	Not Required	

BOLTARON® FAR RATED SHEET PRODUCTS

Impact resistant FAR 25.853(d) sheet grades - opaque

- Boltaron® 9815E: Extruded, full range of colors, textures
- Boltaron® 9815D: Decorative patterns, textures
- Boltaron® 9815M: Metallic surface finish
- Boltaron® 9815F: Film, thin-gauge sheet
- Boltaron® 9815P: Custom textures
- Boltaron® 9850: 50/50 RHR

Enhanced performance grades

- Boltaron® 4205: Superior temperature resistance
- Boltaron® 4330: Superior impact resistance
- Boltaron® 4800: FAR smoke emissions & flame rated

Translucent grades

- Boltaron® 4350: Custom routed parts
- Boltaron® 9816: Custom routed parts; FAR 25.853(a),(d)
- Boltaron® 9916: Custom routed parts, fully compliant

Window shade grades

- Boltaron® 9200/9200C
- Boltaron® 9250/9250C: Higher temperature

Additional Boltaron FAR-rated grades

- Boltaron® 6800E

SIMONA offers the widest product range of PVC sheet and rod – FM 4910 rated sheet – chemical resistant materials from PVC, PP and PE to fluoropolymers – orthotics and prosthetics sheet – Boltaron aircraft sheet – plus proven products for boat building, outdoor furniture and many other industries.

DISCLAIMER AND LIMITATION OF WARRANTY:

All information contained herein is believed by SIMONA AMERICA Inc. to be reliable. Typical properties are based on laboratory tests conducted on material samples in accordance with standard test methodology. SIMONA AMERICA Inc. makes no express or implied warranty that its products will perform in accordance with the data in all conditions and circumstances. To determine suitability for use, users must test applications under actual operating conditions. As a result, ALL EXPRESS OR IMPLIED WARRANTIES IN CONNECTION WITH SIMONA AMERICA INC. and BOLTARON PRODUCTS INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY DISCLAIMED.

Boltaron Inc.

1 General Street
Newcomerstown, OH 43832
Phone 1 740 498 5900
(US) 1 800 342 7444
Fax 1 740 498 5448
info@boltaron.com
www.boltaron.com